

11/03/00



jc943 U.S. PTO

11-06-00

A

Patent Application
Docket No. 34650-00605USPTO



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Leif Wilhelmsson, et al.

Entitled: METHOD AND APPARATUS FOR DYNAMIC PACKET SELECTION
IN UNCOORDINATED RADIO SYSTEMS

To the Assistant Commissioner
for Patents
Box Patent Application
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL	
"EXPRESS MAIL" Mailing Label No. EL654513486US	
Date of Deposit: November 3, 2000	
I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231	
Type or Print Name	Carol Mitchell
<i>Carol Mitchell</i>	Signature

Dear Sir:

REQUEST FOR FILING A NATIONAL PATENT APPLICATION

Transmitted herewith for filing, please find the following:

- X 1. Specification, claims and abstract of the above-referenced patent application having 41 pages.
- X 2. Five (5) sheet(s) of drawing(s) (formal / x informal) comprising Figures 1-5.
- X 3. Combined Declaration and Power of Attorneys (signed x unsigned).
- 3A. No filing fee, Oath, or Declaration is enclosed pursuant to 37 C.F.R 1.53(d).
4. Information Disclosure Statement along with Form PTO-1449 and references.

___ 5. This is a: ___ Continuation-In-Part; ___ Divisional; ___ Continuation;
___ substitute Application (MPEP 201.09) of Application Serial No. ___ filed ___;
___ reissue of U.S. Patent No. ___ filed on ___.

An extension to extend the life of the above prior Application to at least the date
of filing hereof

(One box must be marked)

- (a) ___ is concurrently being filed in that prior Application,
(b) ___ was previously filed in that prior Application,
(c) ___ is not necessary for copendency.

___ 6. Attached is an assignment to Telefonaktiebolaget L M Ericsson (publ). Please return
the recorded assignment to the undersigned.

X 7. Priority is claimed under 35 U.S.C. § 119(e) based on filings in the U.S.

	<u>Application No.</u>	<u>Filing Date</u>
(1)	60/212,774	June 20, 2000
(2)	___	___
(3)	___	___

___ (No.) Certified copy (copies) ___ are attached; or ___ were previously filed on
___.

___ 8. Attached: ___ (No.) verified statement(s) establishing "small entity" status under 37
CFR § 1.9 and 1.27.

X 9. Attached:

X Return Postcard
___ (Other)

___ 10. Preliminary Amendment:

Prior to a first Office Action, kindly amend the Application as follows:

- X 11. The following Filing Fee calculation is based on the claims filed less any claims canceled by the Preliminary Amendment of Item 10.


BASIC FEE				SMALL ENTITY RATE		LARGE ENTITY RATE			
				\$355	<u>OR</u>	\$710	=	\$ 710.00	
TOTAL CLAIMS	NUMBER FILED			NUMBER EXTRA					
	<u>40</u>	-20	=	<u>20</u> (at least 0)	x 9	<u>OR</u>	x 18	=	+\$ 360.00
INDEP. CLAIMS	<u>2</u>	-3	=	<u>0</u> (at least 0)	x 40	<u>OR</u>	x 80	=	+\$
If any <u>proper</u> multiple dependent claim (ignore improper) is present (Enter \$0.00 if this is a <u>reissue</u> application.)									
				+\$135	<u>OR</u>	+\$270	=	+\$	
If assignment is x'd (item 6), add recording fee \$40.00									
								\$	
Attached is a Rule 47 Petition (inventor refuses to sign or cannot be reached) \$130									
								+\$	
TOTAL FILING FEE									= \$1070.00

- X 12. A check in the amount of \$1070.00 to cover the Filing Fee calculated in Item 11 is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.
13. Please charge my Deposit Account No. 10-0447 in the amount of \$_____ to cover the Filing Fee calculated in Item 11. This sheet is attached in duplicate.
- X 14. The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and may be required under 37 CFR 1.16-1.18 (missing or insufficiencies only) now or hereafter relative to this application and for the resulting Official Document under 37 CFR 1.20, and to have and cause any necessary petition for extension of time to be filed and any fees necessary to be paid for said extension of time OR credit any overpayment to our Deposit Account No. 10-0447, for which purpose a

duplicate copy of this sheet is attached. **The Commissioner is not authorized to charge the issue fee until/unless an issue fee transmittal form is filed.**

Respectfully submitted,

JENKENS & GILCHRIST, P.C.

By: 
Name: Richard J. Moura
Reg. No. 34,883

Jenkins & Gilchrist, P.C.
1445 Ross Avenue
Suite 3200
Dallas, Texas 75202
(214) 855-4709
(214) 855-4300 (fax)

Patent Application
Docket # 34650-00605USPT
P13615

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EL654513486US

Date of Deposit: November 3, 2000

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231

Type or Print Name: Carol Mitchell

Carol Mitchell
Signature

METHOD AND APPARATUS FOR DYNAMIC PACKET SELECTION
IN UNCOORDINATED RADIO SYSTEMS

BACKGROUND OF THE PRESENT INVENTION

Field of the Invention

5 This Application for Patent claims the benefit of priority from, and hereby incorporates by reference the entire disclosure of, co-pending U.S. Provisional Application for Patent Serial No. 60/212,774, filed June 20, 2000.

10 The present invention is related to digital communication in uncoordinated radio systems and, in particular, to a method and apparatus for optimizing system performance by adapting the packet type to the conditions of the communication channel.

Description of the Related Art

In certain wireless communications systems, the data to be communi- are typically transmitted over a channel in bursts of packets. The packets may vary both in the length of each packet in the burst and the encoding of the packets. For example, in a high bit error rate environment, it may be advisable to use shorter length packets in order to reduce the number of corrupted packets received. Similarly, where the channel environment renders an error correction scheme ineffective, it may be advisable to switch to uncoded instead of coded packets. Moreover, channel conditions are subject to changes that may make a previously optimum packet type suddenly unsuitable for the new channel conditions. Therefore, it is desirable to be able to provide a way to select the packet type, and to do so dynamically based on the condition of the wireless channel.

Dynamic packet selection would be especially useful to reduce the effect of interference in uncoordinated or ad hoc networks like the Bluetooth (TM) wireless network that operates in the unlicensed 2.45 GHz, ISM (Industrial, Scientific and Medical) band. Referring now to FIGURE 1, an ad hoc network 10 is shown comprising a number of electronic

devices including a laptop computer 12, a personal digital assistant 14, and a mobile phone 16, all of which are interconnected by wireless links represented here by the jagged lines. The nature of the ad hoc network 10, as the name implies, is such that the network connections may be quickly added to and removed from the network 10. For example, additional mobile phones 16 may be easily added to the ad hoc network 10 simply by bringing the new mobile phones to within a certain range or distance of the network 10.

However, because the ad hoc network 10 operates in an unlicensed (unregulated) frequency band, other devices and networks that may be using the same band may unexpectedly interfere with the operation of the network. In fact, since it is possible for an interfering device to be much closer to the receiving device than the intended transmitting device, the signal-to-interference ratio (SIR) can be extremely small, on the order of -20 dB. Also, for a system operating in an unlicensed band such as the 2.45 GHz ISM band, the interferer may be a device with significantly higher output power, such as microwave ovens. In that case,

the SIR can be up to 20 dB beyond the range where the network is working properly.

One method of reducing the effect of interference in an ad hoc network is to use some type of spread spectrum technique. There are essentially two ways that a spread spectrum system can mitigate interference: interference suppression and interference avoidance.

An example of interference suppression can be found in Direct Sequence Spread Spectrum (DSSS) where the information signal is spread over a wide band by the spreading sequence. Signals that are not spread according to the spreading sequence are suppressed at the receiver side. Here, the instantaneous bandwidth of the carrier greatly exceeds the bandwidth of the information to be communicated. However, the processing gain (PG), which is the ratio of the carrier bandwidth to the information bandwidth, is obtained through the spreading sequence. Therefore, for a multiple access system based on DSSS to work properly, the interfering signal should not be too much stronger than the desired one because suppression of the interferer will be limited by the PG. (See, e.g., J. C. Haartsen, "The Bluetooth Radio System," *IEEE Personal Communications*, Vol. 7, No. 1, Feb. 2000.)

A multiple access technique which is based on interference avoidance can be found in Frequency Hopped Spread Spectrum (FHSS) where the amount of time the information signal dwells on any carrier frequency is kept very short (less than 10 ms) to reduce the probability of being "hit" by an interferer. In FHSS, the instantaneous carrier bandwidth is on the same order as the information bandwidth (unlike in DSSS). Instead, the PG is obtained by letting the carrier frequency hop over a total bandwidth which is in great excess of the instantaneous bandwidth.

Although the above techniques may be effective in their own way, none provide a method or apparatus for selecting a packet type based on the channel conditions or changes thereto in order to minimize the effects of interference.

SUMMARY OF THE INVENTION

The present invention is related to a method or an apparatus for dynamically selecting a packet type based on the quality estimates of the channel. From these channel quality estimates, specific properties of the packet may be selected including whether a coding scheme should be used, the packet length, and the modulation used. The packet type

selection is then performed in a dynamic fashion based on updates or changes to the channel conditions.

In one aspect, the invention is related to a method for improving a network connection in a wireless network. The method comprises the steps of determining at least one quality measure for a channel of the network connection, estimating a quality condition for the channel based on the at least one quality measure, and selecting a packet type to be transmitted over the channel based on the quality condition.

In another aspect, the invention is related to a communications device for communicating over a network connection in a wireless network. The device comprises a channel quality processor for determining at least one quality measure of a channel of the network connection, and a channel condition processor coupled to the channel quality processor for estimating a quality condition of the channel based on the at least one quality measure. A packet type selector is coupled to the channel condition processor for selecting a packet type to be transmitted over the channel based on the channel quality condition.

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components, but does not preclude the presence or
5 addition of one or more other features, integers, steps, components or groups thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and
10 apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 illustrates a prior art ad hoc network;

FIGURE 2 illustrates an exemplary transmitter and
15 receiver according to an embodiment of the invention;

FIGURE 3 illustrates an example of a packet selection algorithm according to an embodiment of the present invention.

FIGURE 4 illustrates a flow chart of one aspect of the
20 method of the present invention; and

FIGURE 5 illustrates a functional block diagram according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

The preferred embodiment of the present invention and its advantages are best understood by referring to the Drawings, wherein like numerals are used for like and
5 corresponding parts.

As mentioned previously, the present invention provides a method and an apparatus for dynamically selecting a packet type based on one or more channel quality estimates. Referring now to FIGURE 2, an exemplary ad hoc network
10 connection is shown between two electronic devices. For convenient reference, the devices have been designated as a transmitter 20 and a receiver 24; however, those of ordinary skill in the art will understand that either device may function as a transmitter or receiver as needed. Each of the
15 transmitter 20 and receiver 24 includes a radio unit 22 and 26, respectively, for sending and receiving information across the wireless network connection represented by the jagged line.

The channel quality estimates may be determined using
20 channel information obtained from either the receiver 24, the transmitter 20, or both. In particular, the invention makes use of easily obtained parameters such as the transmitter

side power, the RSSI value, the number of retransmissions, and in the case of an error correcting code, how many errors have been corrected. From the channel estimates, it can be determined whether interference or noise is the primary
5 limiting factor. If it is interference, then steps may be taken to reduce the probability of interference by an interferer. If it is noise, coding and/or modulation may be used to enhance the resistance to noise.

In order to obtain channel information from both the
10 receiver 24 and transmitter 20, the transmitter 20 needs to know how the receiver 24 works, and vice versa. This means that the quality measure algorithms to be employed on the transmitter 20 and receiver 24 may have to be specified in a standard. If no such specification exists in the standard,
15 then one of the devices 20 and 24 should be able to control the signal traffic in both directions. It might also be that one of the devices 20 and 24 has an algorithm that is not working properly. In that case, it is desirable that the device with a properly working algorithm has the ability to
20 "overrule" the algorithm of the other device in order to enhance the network performance.

Some of the channel quality measures used by the method and apparatus of the present invention will now be defined in a general sense.

Q_{RSSI} represents a quality measure based on the RSSI value mentioned previously. This quality measure may be determined at the receiver side.

Q_{PA} represents a quality measure based on the power at the transmitter side, for instance the voltage to the Power Amplifier, V_{PA} . This quality measure may be determined at the transmitter side.

Q_{CRC} represents a quality measure indicating the fraction of packets that have been declared as correctly received by an error detection scheme using, for example, a Cyclic Redundancy Check (CRC) code. This quality measure may be determined at the receiver side.

Q_{FEC} represents a quality measure indicating how many errors have been corrected by a Forward Error Correcting (FEC) code. This quality measure is only applicable when the FEC code is employed and may be determined at the receiver side.

Q_{ARQ} represents a quality measure indicating the fraction of packets positively acknowledged based on the number of Automatic Repeat reQuests. This quality measure may be determined from the baseband at the transmitter side.

5 Note that in a situation with no errors in the feedback from the receiver side to the transmitter side, Q_{ARQ} would be the same as Q_{CRC} .

Q_{TSYNC} represents a quality measure indicating how well the time synchronization is performed. For instance, in the case where the sampling time is found by correlating the received sequence with a known synchronization word, Q_{TSYNC} can reflect the obtained correlation value at the time synchronization is found. Q_{TSYNC} may be determined from the baseband component at the receiver side.

10

Q_{FSYNC} represents a quality measure indicating how well the frequency synchronization is done. For instance, $1/Q_{FSYNC}$ may be used to represent the variance in the frequency estimate. Q_{FSYNC} may be determined from the baseband component at the receiver side.

15

Following is a description of how the above quality measures can be updated, in very general terms, to obtain the most recent quality measures.

For example, the Q_{RSSI} value for the (k+1)th packet can be updated using the RSSI value for the (k+1)th packet and the previous Q_{RSSI} value as follows:

$$Q_{RSSI}(k+1) = f_{RSSI}(Q_{RSSI}(k), RSSI(k+1)) \quad (1)$$

where f_{RSSI} denotes some function that can be used to update the Q_{RSSI} quality measure.

In general, the function f may be one of several two-variable functions to be described later herein that can be used to update the various quality measures. In order to emphasize that it is not necessary to use the same function with every quality measure, each function f used herein has a subscript appended thereto corresponding to the particular quality measure being updated. For example, the function f in equation (1) has the RSSI subscript appended thereto corresponding to the received signal strength quality measure Q_{RSSI} .

The Q_{PA} value for the $(k+1)$ th packet can be updated using the V_{PA} value for the $(k+1)$ th packet and the previous Q_{PA} value as follows:

$$Q_{PA}(k+1) = f_{PA}(Q_{PA}(k), V_{PA}(k+1)) \quad (2)$$

5 The Q_{CRC} value for the $(k+1)$ th packet can be updated using the M_{CRC} value for the $(k+1)$ th packet and the previous Q_{CRC} value, as shown below. The M_{CRC} value equals 1 if the CRC is verified (i.e., packet is received correctly) and 0 otherwise.

10

$$Q_{CRC}(k+1) = f_{CRC}(Q_{CRC}(k), M_{CRC}(k+1)) \quad (3)$$

The Q_{FEC} value for the $(k+1)$ th packet can be updated using the M_{FEC} value for the $(k+1)$ th packet and the previous Q_{FEC} value, as shown below. In general, M_{FEC} is a momentary quality measure indicating the number of errors per packet per codeword (it is possible for one packet to have several codewords). The M_{FEC} value is the number of errors that have been corrected by the FEC code.

15

$$Q_{FEC}(k+1) = f_{FEC}(Q_{FEC}(k), M_{FEC}(k+1)) \quad (4)$$

The Q_{ARQ} value for the (k+1)th packet can be updated using the M_{ARQ} value for the (k+1)th packet and the previous Q_{ARQ} value, as shown below. The M_{ARQ} value can either reflect whether the last transmitted packet was accepted at the other side, that is $M_{ARQ}=0$ or 1, or it can be the number of times
5 a certain packet has been updated, i.e., $M_{ARQ}=0, 1, 2$, etc.

$$Q_{ARQ}(k+1) = f_{ARQ}(Q_{ARQ}(k), M_{ARQ}(k+1)) \quad (5)$$

The Q_{TSYNC} value for the (k+1)th packet may be updated using the M_{TSYNC} value for the (k+1)th packet and the previous Q_{TSYNC} value, as shown below. The M_{TSYNC} value
10 reflects the quality of the time synchronization. In general, time synchronization may be obtained by correlating the received signal with a known "synchronization word." As such, M_{TSYNC} may be a value in the range of, for example, 0
15 to Sync_Max to reflect this correlation, where Sync_Max is the maximum value corresponding to the best possible quality of the time synchronization.

$$Q_{TSYNC}(k+1) = f_{TSYNC}(Q_{TSYNC}(k), M_{TSYNC}(k+1)) \quad (6)$$

The Q_{FSYNC} value for the (k+1)th packet may be updated
20 using the M_{FSYNC} value for the (k+1)th packet and the

previous Q_{FSYNC} value, as shown below. The M_{FSYNC} value reflects the quality of the frequency synchronization. Typically, frequency offset does not change very much from one packet to another on the same link (i.e., for the same transmitter-receiver pair). Therefore, if the estimated frequency offset differs significantly for one packet, the link may be assumed to be a poor one, and the M_{FSYNC} value chosen accordingly.

$$Q_{FSYNC}(k+1) = f_{FSYNC}(Q_{FSYNC}(k), M_{FSYNC}(k+1)) \quad (7)$$

The function f which is used to update the above quality measures, as explained above, can be a number of different functions. Using the Q_{CRC} quality measure as an example, these functions include:

Auto Regressive:

$$Q_{CRC}(k+1) = \lambda Q_{CRC}(k) + (1-\lambda)M_{CRC}(k+1) \quad (8)$$

where λ represents a "forgetting factor," $0 \leq \lambda \leq 1$.

Moving Average:

$$Q_{CRC}(k+1) = \frac{1}{N} \sum_{n=k-N+2}^{k+1} M_{CRC}(n) \quad (9)$$

Average Up to Time (k+1):

$$Q_{CRC}(k+1) = \frac{1}{k+1} \sum_{n=1}^{k+1} M_{CRC}(n) \quad (10)$$

The method of the present invention can be divided into two parts. First, determine which packet type is the best to use for a certain channel condition. Second, determine via a selection algorithm when to change the packet type based on quality estimates of the channel conditions.

To determine which packet type is the best for a certain channel condition, the data rate and throughput for the different packet types can be found for different channel conditions. This information is typically obtained by simulation, but it can also be obtained by direct measurements if a test system is available. For convenient reference, the data rate and throughput for the different packet types of the Bluetooth (TM) wireless system has been tabulated in TABLE 1 and TABLE 2 below. Note that although the Bluetooth (TM) system is used here, the invention is not limited thereto and other suitable systems may be used without departing from the scope thereof.

TABLE 1 shows the achieved data rate in kbit/s for the different packet types, and TABLE 2 shows the corresponding throughput which is the probability that a packet is correctly received. By combining TABLE 1 and TABLE 2, one
5 can determine both which packet type is optimum and also the throughput for the different packet types. The latter may become very useful knowledge in trying to get the selection algorithm to work properly.

Packet Type	DH5	DH3	DH1	DM5	DM3	DM1
$Pb = 10^{-2}, Pi = 0\%$	0	0	16	81	147	92
$Pb = 10^{-3}, Pi = 0\%$	51	89	135	468	383	109
$Pb = 10^{-4}, Pi = 0\%$	542	503	169	478	387	109
$Pb = 10^{-5}, Pi = 0\%$	702	580	173	478	387	109
$Pb = 10^{-6}, Pi = 0\%$	723	586	173	478	387	109
$Pb = 10^{-2}, Pi = 1\%$	0	0	16	76	139	91
$Pb = 10^{-3}, Pi = 1\%$	46	129	133	425	360	107
$Pb = 10^{-4}, Pi = 1\%$	492	474	166	435	364	107
$Pb = 10^{-5}, Pi = 1\%$	636	545	169	433	364	107
$Pb = 10^{-6}, Pi = 1\%$	651	550	169	435	364	107
$Pb = 10^{-2}, Pi = 5\%$	0	0	15	53	108	85
$Pb = 10^{-3}, Pi = 5\%$	30	100	123	425	360	107
$Pb = 10^{-4}, Pi = 5\%$	333	378	154	287	287	99
$Pb = 10^{-5}, Pi = 5\%$	427	427	157	287	287	99
$Pb = 10^{-6}, Pi = 5\%$	434	433	157	287	287	99
$Pb = 10^{-2}, Pi = 10\%$	0	0	14	29	81	76
$Pb = 10^{-3}, Pi = 10\%$	17	70	111	162	205	89
$Pb = 10^{-4}, Pi = 10\%$	188	269	140	162	209	89
$Pb = 10^{-5}, Pi = 10\%$	239	310	142	162	209	89
$Pb = 10^{-6}, Pi = 10\%$	246	316	142	162	209	89
$Pb = 10^{-2}, Pi = 15\%$	0	0	12	15	58	69
$Pb = 10^{-3}, Pi = 15\%$	9	51	100	86	143	81
$Pb = 10^{-4}, Pi = 15\%$	101	187	126	86	143	81
$Pb = 10^{-5}, Pi = 15\%$	130	217	128	86	143	81
$Pb = 10^{-6}, Pi = 15\%$	130	217	128	86	143	81

TABLE 1

Packet Type	DH5	DH3	DH1	DM5	DM3	DM1
$P_b = 10^{-2}, P_i = 0\%$	0	0	0.095	0.17	0.30	0.85
$P_b = 10^{-3}, P_i = 0\%$	0.070	0.23	0.78	0.98	0.99	1.00
$P_b = 10^{-4}, P_i = 0\%$	0.75	0.86	0.98	1.00	1.00	1.00
$P_b = 10^{-5}, P_i = 0\%$	0.97	0.99	1.00	1.00	1.00	1.00
$P_b = 10^{-6}, P_i = 0\%$	1.00	1.00	1.00	1.00	1.00	1.00
$P_b = 10^{-2}, P_i = 1\%$	0	0	0.094	0.16	0.36	0.84
$P_b = 10^{-3}, P_i = 1\%$	0.064	0.22	0.77	0.89	0.93	0.98
$P_b = 10^{-4}, P_i = 1\%$	0.68	0.81	0.96	0.91	0.94	0.98
$P_b = 10^{-5}, P_i = 1\%$	0.88	0.93	0.98	0.91	0.94	0.98
$P_b = 10^{-6}, P_i = 1\%$	0.90	0.94	0.98	0.91	0.94	0.98
$P_b = 10^{-2}, P_i = 5\%$	0	0	0.087	0.118	0.28	0.78
$P_b = 10^{-3}, P_i = 5\%$	0.041	0.17	0.71	0.59	0.73	0.91
$P_b = 10^{-4}, P_i = 5\%$	0.46	0.64	0.89	0.60	0.74	0.91
$P_b = 10^{-5}, P_i = 5\%$	0.59	0.73	0.91	0.60	0.74	0.91
$P_b = 10^{-6}, P_i = 5\%$	0.60	0.74	0.91	0.60	0.74	0.91
$P_b = 10^{-2}, P_i = 10\%$	0	0	0.079	0.06	0.21	0.70
$P_b = 10^{-3}, P_i = 10\%$	0.024	0.12	0.64	0.34	0.53	0.82
$P_b = 10^{-4}, P_i = 10\%$	0.26	0.46	0.81	0.34	0.54	0.83
$P_b = 10^{-5}, P_i = 10\%$	0.33	0.53	0.82	0.34	0.54	0.82
$P_b = 10^{-6}, P_i = 10\%$	0.34	0.54	0.82	0.34	0.54	0.82
$P_b = 10^{-2}, P_i = 15\%$	0	0	0.070	0.031	0.15	0.63
$P_b = 10^{-3}, P_i = 15\%$	0.013	0.088	0.58	0.18	0.37	0.74
$P_b = 10^{-4}, P_i = 15\%$	0.14	0.32	0.73	0.18	0.37	0.74
$P_b = 10^{-5}, P_i = 15\%$	0.18	0.37	0.74	0.18	0.37	0.74
$P_b = 10^{-6}, P_i = 15\%$	0.18	0.37	0.74	0.18	0.37	0.74

TABLE 2

In the two tables, P_b is the bit error probability due to noise when there is no interference, and P_i is the probability that an interferer is present. In case an interferer is present, it is assumed herein that the packet is not correctly received, but has to be retransmitted. DMx and DHx represent coded and uncoded packet types, respectively, with 'x' representing the packet length. For example, DH3 is an uncoded packet having three times the length of a DH1 packet. Details of the different Bluetooth (TM) packet types can be found in the Bluetooth (TM) specification at, e.g., [Http://www.bluetooth.com](http://www.bluetooth.com).

Consider now the case where $P_i = 0\%$ so that the channel conditions are best approximated by one of the first five rows. Looking across each of the first five rows of TABLE 1, it can be seen that DH5 packets provide the highest data rate for rows 3-5. Next, by looking at the corresponding rows 3-5 in TABLE 2, it is readily seen that a necessary condition for DH5 packets to be the optimum choice is that the throughput be about 0.70 or more. If the throughput for DH5 packets drops to, say, 0.10, then it is probably desirable to switch to DM5 type packets instead. The reason is because the drop in throughput is likely due to noise (recall $P_i = 0\%$), and

the coded DMx type packets would be more noise resistant,
thus allowing the network to operate at a lower signal-to-
noise ratio (SNR).

Next, assume that DH5 packets are used and $P_b = 5\%$,
5 meaning that the network is interference limited. Now,
assume the DH5 throughput drops to 0.60. No packet type
switch should be made yet because DH5 packets still provide
the highest throughput of the available packet types. As can
be seen from TABLE 2, a throughput of 0.60 means that P_b is
10 about 10^{-6} . Therefore, considering the corresponding row
in TABLE 1, it can be seen that DH5 gives the highest data
rate. However, if the throughput becomes even smaller, one
may consider switching to the shorter DH3 packets in order
to decrease the probability that a packet will be corrupted
15 by the interference. Note that the coded DMx type packets
should probably not be selected because, in general, encoding
schemes are more effective in noise limited environments.

From the foregoing, it should be clear that an optimal
packet type may be selected based on information about the
20 channel conditions. Following is a description of an
algorithm that can be used to switch the packet type based

on information about changes in the channel conditions, in accordance with the present invention.

The algorithm estimates the channel conditions using one or more of the updated quality measures mentioned previously to determine whether the system is noise or interference limited, *i.e.*, which rows in TABLES 1 and 2 best describe the current channel conditions. In one exemplary embodiment, if coded DMx packets are used, one can combine the information from the Q_{CRC} and Q_{FEC} values available at the receiver side to determine whether any errors have been corrected in those packets that were accepted as correct. For instance, equation (8) can be used for both Q_{CRC} and Q_{FEC} with $M_{FEC} = 1$ if no errors have been corrected, and $M_{FEC} = 0$ otherwise. If $Q_{CRC} \cong Q_{FEC}$, then for almost all packets that were accepted, no errors were corrected. Consequently, an error correcting scheme would be of little use under such channel conditions, and the network should therefore be switched to uncoded DHx type packets. On the contrary, if $Q_{CRC} \gg Q_{FEC}$, then for a majority of the accepted packets, at least one bit was corrected. Accordingly, use of the coded DMx type packets

should be continued because retransmissions will be increased if there is no error correction.

In another exemplary embodiment, by using the Q_{RSSI} and Q_{CRC} values which are found at the receiver side, it is possible to deduce the case where the received signal strength is good (e.g., above a predefined level), yet the throughput is still low. In that case, interference may be considered to be the limiting factor and, hence, error coding would have little effect on the throughput. If Q_{RSSI} is low, however, then noise may be considered to be the limiting factor. In that case, error coding may be used to increase the throughput if this is not already the case, or the output power of the transmitter side may be increased (unless it is already transmitting at the maximum power).

In yet another exemplary embodiment, the algorithm uses the Q_{ARQ} and V_{PA} values which are found at the transmitter side to estimate the channel conditions. If V_{PA} is not at the maximum specified value, then the receiver side probably already has a sufficiently high RSSI value and does not require a stronger signal. Otherwise, assuming power control is implemented, the receiver side would have requested increased transmitter side power had the received signal

strength been too low. Accordingly, because the received
signal strength is sufficient, noise is probably not the
limiting factor. Consequently, if Q_{ARQ} is still small, the
packet type should be switched to a type that is less
5 affected by interference, for instance, shorter packets.
However, if V_{PA} is at the maximum specified value, then noise
is probably the limiting factor, and more robust packets from
a noise standpoint should be used. For example, more robust
signal modulation may be used, such as reducing the number
10 of signal points in the constellation if phase shift keying
(PSK) is used, or DMx packets with an error correcting code
(of lower rate) should be used.

In still another exemplary embodiment, the three
previous embodiments can be combined to produce estimates of
15 the channel conditions. In particular, since the first two
embodiments employed information obtained from the receiver
side, this information can be fed back to the transmitter
side and subsequently combined with the third embodiment.

In still another exemplary embodiment, the transmitter
20 side algorithm may override the receiver side algorithm. In
general, it is the transmitter side that controls which
packet type is to be transmitted, but the receiver side may

make requests based on receiver side estimates of channel conditions. However, the transmitter side may choose to ignore the inputs from the receiver side if the transmitter side determines the requests to be unreliable or incorrect.

5 For example, if the receiver side requests uncoded packets in spite of the fact that V_{PA} is at the maximum value and Q_{ARQ} is small, the transmitter side can decide to switch to coded packets anyway.

Referring now to FIGURE 3, a state diagram illustrating an exemplary algorithm is shown with each state representing a different packet type. There are six packet types shown with DHx and DMx representing uncoded and coded packets, respectively, and 'x' indicating the relative lengths of the packets. In this particular embodiment, Q_{FEC} and Q_{CRC} are

10 the quality measures used and T1-T15 represent quality threshold values that have been predefined for the particular network. Note that where dual arrows are shown, both quality measures must meet the required threshold values before a change may take place.

20 As can be seen from the diagram, a change from one packet type to another may be made if certain channel conditions exist. For example, if Q_{CRC} and Q_{FEC} are greater

than the predefined quality thresholds T1 and T2 respectively, indicating that the number of packets corrected by the FEC code and, hence, the number of packets confirmed as correct are sufficiently high, then coded packets may no longer be necessary and a switch from coded DM5 packets to uncoded DH5 packets may be made. Similarly, if Q_{CRC} is less than a predefined quality threshold T4, indicating that the number of packets confirmed as correct is too low, a switch from DM5 to shorter DM3 packets may be made to improve the Q_{CRC} value. The remainder of the diagram should be self-explanatory and, therefore, will not be described further.

A problem may occur if an algorithm is designed based on Q_{CRC} alone such that it is not possible to determine whether the network is noise or interference limited. For example, consider a system that is noise limited so that coding is needed, but the throughput is very high so that based on Q_{CRC} alone, a switch from DM5 to DH5 would be (improperly) made. Since coding is still needed, the algorithm would subsequently change the packet type according to the following order: DH3, DH1, DM1, DM3 and then back to DM5. Now, if the channel conditions have not changed, this

means that the high throughput would again indicate a change should be made to DH5 packets, and the loop would start all over.

In still another exemplary embodiment, in order not to
5 get stuck in such a loop, a back-off timer may be used, as
will now be described in conjunction with the process shown
in FIGURE 4. Consider the case where it is not possible to
determine whether the network is noise or interference
limited by combining two or more quality measures. Using a
10 quality measure for the throughput such as Q_{CRC} for the
receiver side or Q_{ARQ} for the transmitter side, a back-off
timer may be introduced. For example, after a switch in
packet type from coded to uncoded has been made (step 40),
a back-off timer of, say, 10 seconds is started (step 41).
15 Thereafter, a determination is made as to whether a
subsequent change in packet type is desired (step 42). If
no, the determination is repeated until an affirmative answer
is received. Upon obtaining a yes, a determination is made
as to whether the desired changed is from coded to uncoded
20 packet types (step 43). If no, then it is not necessary to
delay the process and the desired packet type change can be
performed accordingly (step 44). However, if yes, then a

10

20

components, or some combination of discrete and integrated components.

The channel quality processor 50 obtains and updates the channel quality measures in the manner described previously and at predefined intervals as specified in the radio unit 22. Based on the updates of the channel quality measures, the channel condition processor 52 analyzes one or more of these quality measures in order to make an estimate of the current channel condition, e.g., whether the channel is noise or interference limited. Thereafter, the packet type selector 54 selects the type of packet to be used that will minimize the effects of the noise and/or interference on the network connection. If the optimum packet type is already selected, then the packet type selector 54 may simply retain that packet type.

The receiver unit 56 receives packets transmitted over the network and forwards them to the channel quality processor 50. From the packets received by the receiver unit 56, certain receiver side quality measures may be determined such as the Q_{CRC} , Q_{RSSI} , and Q_{FEC} values. Finally, the transmitter unit 58 transmits information across the network using the packet type selected by the packet type selector

54. From the packets transmitted by the transmitter unit 58, certain quality measures such as the Q_{PA} and Q_{ARQ} values may be determined by the channel quality processor 50.

5 In some embodiments, the packet type selector also includes the back-off timer 60 described previously to prevent a coded to uncoded packet type switch from occurring within a predefined amount of time.

10 Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the
15 invention as set forth and defined by the following claims.

WHAT IS CLAIMED IS:

- 1 1. A method for improving a network connection in a
2 wireless network, said method comprising the steps of:
3 determining at least one quality measure for a channel
4 of said network connection;
5 estimating a quality condition for said channel based
6 on said at least one quality measure; and
7 selecting a packet type to be transmitted over said
8 channel based on said quality condition.
- 1 2. The method according to claim 1, wherein said at
2 least one quality measure is determined from a receiver side
3 in said network.
- 1 3. The method according to claim 1, wherein said at
2 least one quality measure is determined from a transmitter
3 side in said network.
- 1 4. The method according to claim 3, wherein said step
2 of estimating a quality condition comprises ignoring receiver
3 side quality measures and using only quality measures
4 determined from said transmitter side.

1 5. The method according to claim 1, wherein which one
2 of said at least one quality measure is determined varies
3 depending on a previously selected packet type.

1 6. The method according to claim 1, wherein an uncoded
2 packet type is selected if said channel is primarily
3 interference limited.

1 7. The method according to claim 1, wherein a coded
2 packet type is selected if said channel is primarily noise
3 limited.

1 8. The method according to claim 1, wherein a
2 relatively short packet type is selected if said channel has
3 a high bit error rate.

1 9. The method according to claim 1, wherein a
2 relatively long, uncoded packet type is selected if said
3 channel is neither interference limited nor noise limited.

1 10. The method according to claim 1, wherein said
2 selected packet type is the same as a previously selected
3 packet type.

1 11. The method according to claim 1, wherein said
2 selected packet type is different from a previously selected
3 packet type.

1 12. The method according to claim 1, wherein said
2 network is an ad hoc network.

1 13. The method according to claim 1, wherein said
2 network is a Bluetooth (TM) wireless network.

1 14. The method according to claim 1, wherein said step
2 of estimating said quality condition includes comparing said
3 at least one quality measure to a predefined value.

1 15. The method according to claim 1, wherein said step
2 of selecting a packet type includes waiting for a predefined
3 time period before selecting said packet type.

1 16. The method according to claim 1, wherein at least
2 an error detection quality measure is used to estimate said
3 channel condition.

1 17. The method according to claim 1, wherein at least
2 a Forward Error Correction quality measure and an error
3 detection quality measure are used to estimate said channel
4 condition.

1 18. The method according to claim 1, wherein at least
2 a received signal strength quality measure and an error
3 detection quality measure are used to estimate said channel
4 condition.

1 19. The method according to claim 1, wherein at least
2 a packets positively acknowledged quality measure and a power
3 amplifier voltage are used to estimate said channel
4 condition.

1 20. The method according to claim 19, wherein said
2 packets positively acknowledged quality measure and said
3 power amplifier voltage are determined based partly on at

4 least one of an error detection quality measure, a Forward
5 Error Correction quality measure, and a received signal
6 strength quality measure.

1 21. A communications device for communicating over a
2 network connection in a wireless network, said device
3 comprising:

4 a channel quality processor for determining at least one
5 quality measure of a channel of said network connection;

6 a channel condition processor coupled to said channel
7 quality processor for estimating a quality condition of said
8 channel based on said at least one quality measure; and

9 a packet type selector coupled to the channel condition
10 processor for selecting a packet type to be transmitted over
11 said channel based on said quality condition of said channel.

1 22. The communications device according to claim 21,
2 further comprising a receiver unit, wherein said at least one
3 quality measure is determined based on information obtained
4 from said receiver unit.

1 23. The communications device according to claim 21,
2 further comprising a transmitter unit, wherein said at least
3 one quality measure is determined based on information
4 obtained from said transmitter unit.

1 24. The communications device according to claim 23,
2 wherein said channel condition processor is configured to
3 ignore receiver side quality measures and to use only quality
4 measures determined based on information obtained from said
5 transmitter unit.

1 25. The communications device according to claim 21,
2 wherein which one of said at least one quality measure is
3 determined varies depending on a previously selected packet
4 type.

1 26. The communications device according to claim 21,
2 wherein said packet type selector selects an uncoded packet
3 type if said channel condition processor determines that said
4 channel is primarily interference limited.

1 27. The communications device according to claim 21,
2 wherein said packet type selector selects a coded packet type
3 if said channel condition processor determines that said
4 channel is primarily noise limited.

1 28. The communications device according to claim 21,
2 wherein said packet type selector selects a relatively short
3 packet type if said channel condition processor determines
4 that said channel has a high bit error rate.

1 29. The communications device according to claim 21,
2 wherein said packet type selector selects a relatively long,
3 uncoded packet type if said channel condition processor
4 determines that said channel is neither interference limited
5 nor noise limited.

1 30. The communications device according to claim 21,
2 wherein said selected packet type is the same as a previously
3 selected packet type.

1 31. The communications device according to claim 21,
2 wherein said selected packet type is different from a
3 previously selected packet type.

1 32. The communications device according to claim 21,
2 wherein said network is an ad hoc network.

1 33. The communications device according to claim 21,
2 wherein said network is a Bluetooth (TM) wireless network.

1 34. The communications device according to claim 21,
2 wherein said channel condition processor is configured to
3 compare said at least one quality measure to a predefined
4 value.

1 35. The communications device according to claim 21,
2 further comprising a timer, wherein said packet type selector
3 is adapted to wait for said timer to expire before selecting
4 said packet type.

1 36. The communications device according to claim 21,
2 wherein at least an error detection quality measure is used
3 to estimate said channel condition.

1 37. The communications device according to claim 21,
2 wherein at least a Forward Error Correction quality measure
3 and an error detection quality measure are used to estimate
4 said channel condition.

1 38. The communications device according to claim 21,
2 wherein at least a received signal strength quality measure
3 and an error detection quality measure are used to estimate
4 said channel condition.

1 39. The communications device according to claim 21,
2 wherein at least a packets positively acknowledged quality
3 measure and a power amplifier voltage are used to estimate
4 said channel condition.

1 40. The communications device according to claim 39,
2 wherein said packets positively acknowledged quality measure
3 and said power amplifier voltage are determined based partly

4 on at least one of an error detection quality measure, a
5 Forward Error Correction quality measure, and a received
6 signal strength quality measure.

00605USPT

5

Houston 200096 v 5, 34650 00605USPT

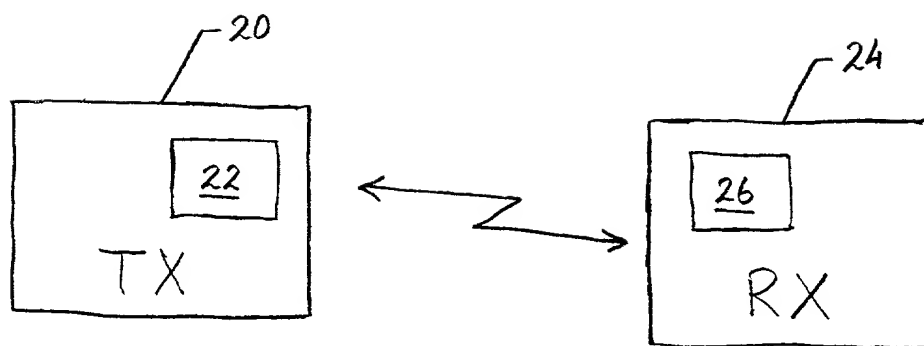


FIG. 2

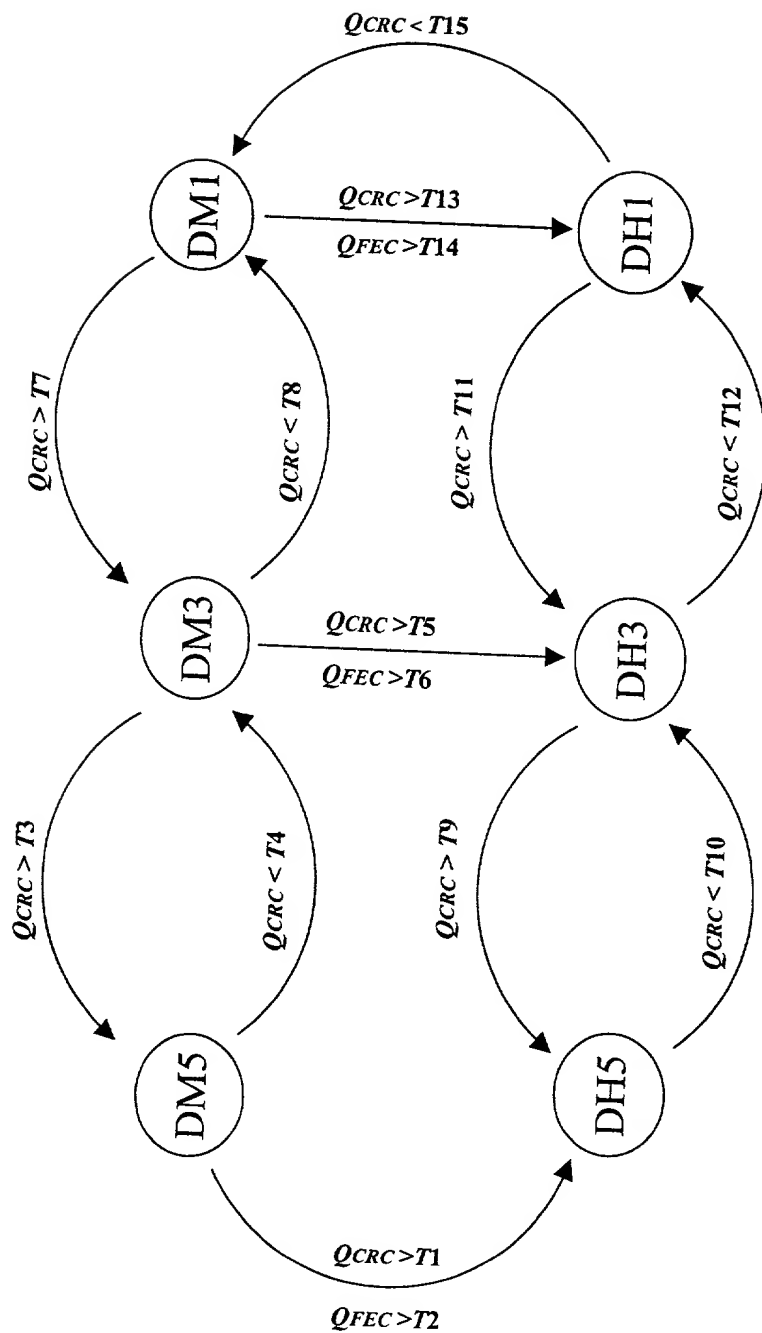


FIG. 3

	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---


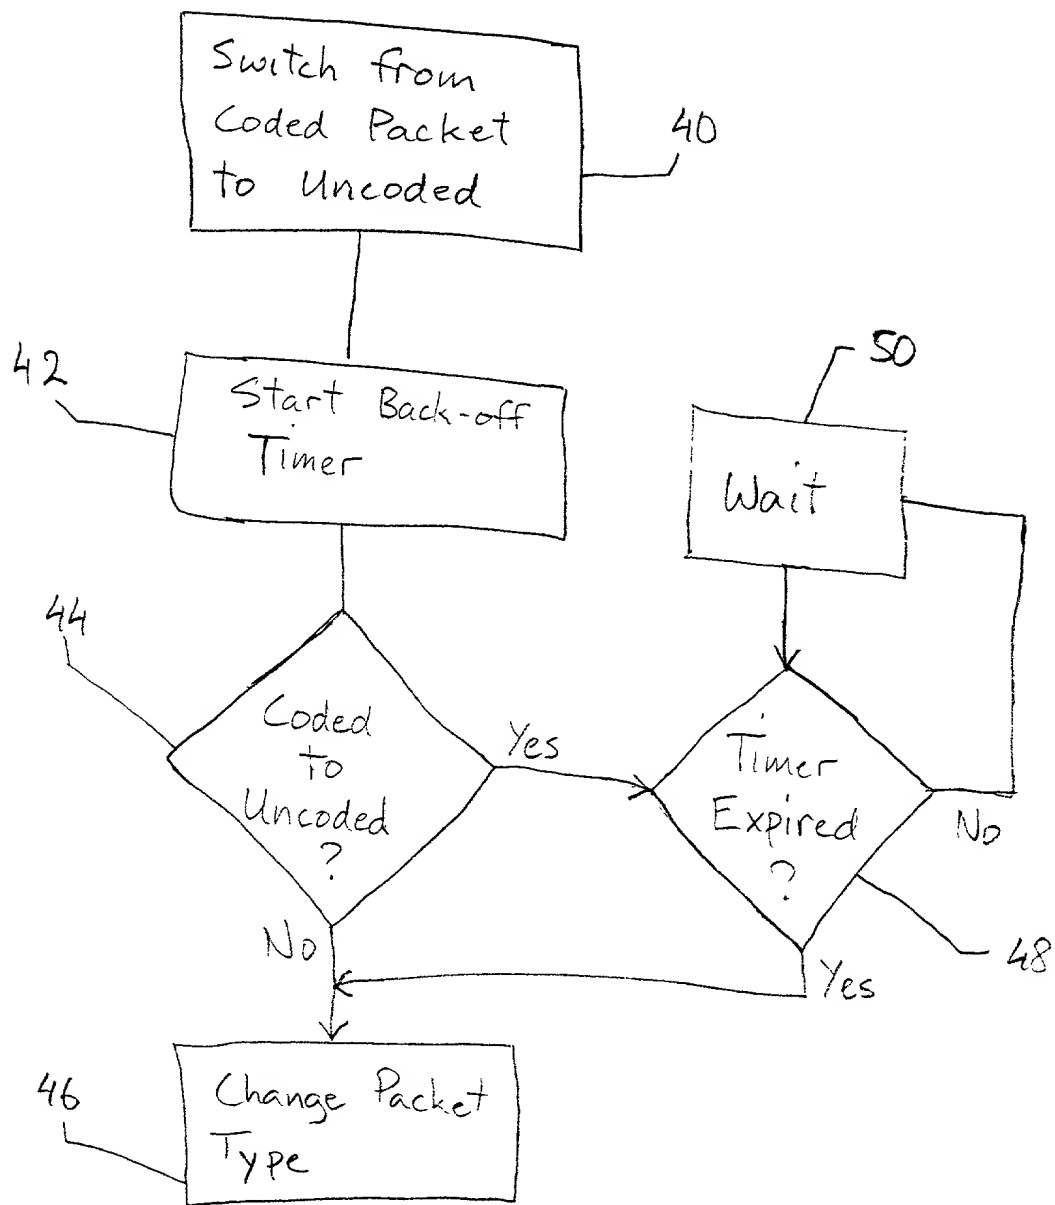


FIG. 4

22

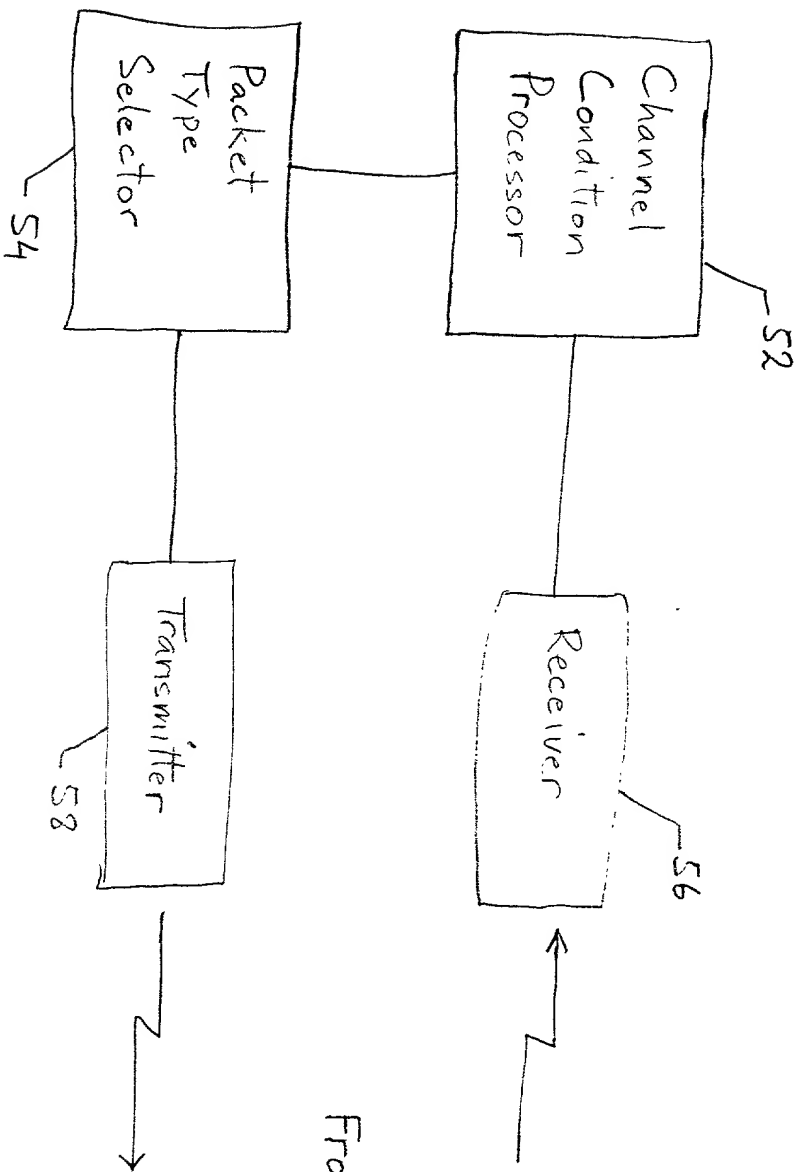

From/To Network

FIG. 5

**RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY**

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND APPARATUS FOR DYNAMIC PACKET SELECTION IN UNCOORDINATED RADIO SYSTEMS**, the specification of which: (mark only one)

- X (a) is attached hereto.
 (b) was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable)
 (c) was filed as PCT International Application No. PCT/_____ on _____ and was amended on _____ (if applicable).
 (d) was filed on _____ as Application Serial No. _____ and was issued a Notice of Allowance on _____.
 (e) was filed on _____ and bearing attorney docket number _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this CIP application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application

on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year Filed</u>	<u>Date first laid-open or Published</u>	<u>Date patented or Granted</u>	<u>Priority Claimed</u>	
					<u>Yes</u>	<u>No</u>
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status(pending, abandoned, patented)</u>
60/212,774	6/20/00	Pending

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493
 THOMAS E. ANDERSON, Reg. No. 37,063
 BENJAMIN J. BAI, Reg. No. 43,481
 MICHAEL J. BLANKSTEIN, Reg. No. 37,097
 MARY JO BOLDINGH, Reg. No. 34,713
 MARGARET A. BOULWARE, Reg. No. 28,708
 ARTHUR J. BRADY, Reg. No. 42,356
 MATTHEW O. BRADY, Reg. No. 44,554
 DANIEL J. BURNHAM, Reg. No. 39,618
 THOMAS L. CANTRELL, Reg. No. 20,849
 RONALD B. COOLLEY, Reg. No. 27,187
 THOMAS L. CRISMAN, Reg. No. 24,846
 STUART D. DWORK, Reg. No. 31,103
 WILLIAM F. ESSER, Reg. No. 38,053
 ROGER J. FRENCH, Reg. No. 27,786
 JANET M. GARETTO, Reg. No. 42,568
 JOHN C. GATZ, Reg. No. 41,774
 RUSSELL J. GENET, Reg. No. 42,571
 J. KEVIN GRAY, Reg. No. 37,141

STEVEN R. GREENFIELD, Reg. No. 38,166
 J. PAT HEPTIG, Reg. No. 40,643
 SHARON A. ISRAEL, Reg. No. 41,867
 JOHN R. KIRK JR., Reg. No. 24,477
 PAUL R. KITCH, Reg. No. 38,206
 TIMOTHY M. KOWALSKI, Reg. No. 44,192
 HSIN-WEI LUANG, Reg. No. 44,213
 JAMES F. LEA III, Reg. No. 41,143
 ROBERT W. MASON, Reg. No. 42,848
 ROGER L. MAXWELL, Reg. No. 31,855
 ROBERT A. McFALL, Reg. No. 28,968
 LISA H. MEYERHOFF, Reg. No. 36,869
 STANLEY R. MOORE, Reg. No. 26,958
 RICHARD J. MOURA, Reg. No. 34,883
 MARK V. MULLER, Reg. No. 37,509
 P. WESTON MUSSELMAN JR. Reg. No. 31,644
 DANIEL G. NGUYEN, Reg. No. 42,933
 SPENCER C. PATTERSON, Reg. No. 43,849

RUSSELL N. RIPPAMONTI, Reg. No. 39,521
 STEPHEN G. RUDISILL, Reg. No. 20,087
 HOLLY L. RUDNICK, Reg. No. 43,065
 J.L. JENNIE SALAZAR, Reg. No. 45,065
 KEITH W. SAUNDERS, Reg. No. 41,462
 JERRY R. SELINGER, Reg. No. 26,582
 GARY B. SOLOMON, Reg. No. 44,347
 ROBERT C. STRAWBRICH, Reg. No. 36,692
 STEVE Z. SZCZEPANSKI, Reg. No. 27,957
 ANDRE M. SZUWALSKI, Reg. No. 35,701
 ALAN R. THIELE, Reg. No. 30,694
 TAMSEN VALOIR, Reg. No. 41,417
 TAMSEN VALOIR, Reg. No. 41,417
 RAYMOND VAN DYKE, Reg. No. 34,746
 BRIAN D. WALKER, Reg. No. 37,751
 GERALD T. WELCH, Reg. No. 30,332
 HAROLD N. WELLS, Reg. No. 26,044
 WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, P.C.**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Richard J. Moura
Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4709
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Leif Wilhelmsson		
	Full Name	Inventor's Signature	Date
	Lyftvägen 5 Se-240 10 Dalby Sweden	Sweden	
	Residence (city, state, country)	Citizenship	
	Lyftvägen 5 Se-240 10 Dalby Sweden		
	Post Office Address (include zip code)		

(FOR ADDITIONAL INVENTORS, check here X and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)

2	Joakim Persson		
	Full Name	Inventor's Signature	Date
	Illiongränden 147 SE-224 72 Lund Sweden	Sweden	
	Residence (city, state, country)	Citizenship	
	Illiongränden 147 SE-224 72 Lund Sweden		
	Post Office Address (include zip code)		

3	Jacobus Haartsen		
	Full Name	Inventor's Signature	Date
	Bruchterweg 81 NL-7772 BG Hardenberg The Netherlands		Dutch
	Residence (city, state, country)		Citizenship
	Bruchterweg 81 NL-7772 BG Hardenberg The Netherlands		
	Post Office Address (include zip code)		

4	Olof Dellien		
	Full Name	Inventor's Signature	Date
	Rudeboksvägen 73 SE-226 55 Lund Sweden		Sweden
	Residence (city, state, country)		Citizenship
	Rudeboksvägen 73 SE-226 55 Lund Sweden		
	Post Office Address (include zip code)		